

TESTINGWHIZ

WHIZGRID™ GUIDE


STARTING TESTINGWHIZ-GRID

Use TestingWhiz as a server and execute tests on remote desktops without installing TestingWhiz on those remote machines. From a central server console, configure the remote machines and the browsers on which to run tests.

➤ Starting a Hub


To start a hub, attach node with default parameters

Go to *Tools > Start Server*

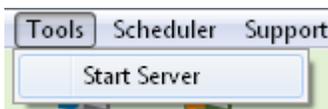


Check whether hub is started or not by `http://{IPAddress}:4444/grid/console`

If hub is connected successfully, then Grid console will appear

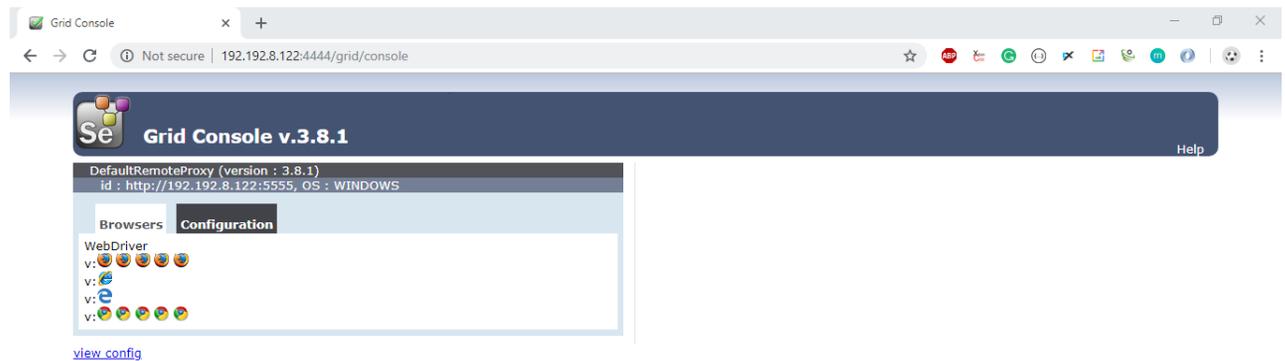

➤ **Starting additional Node**

Execute a Node-manager\launch.jar

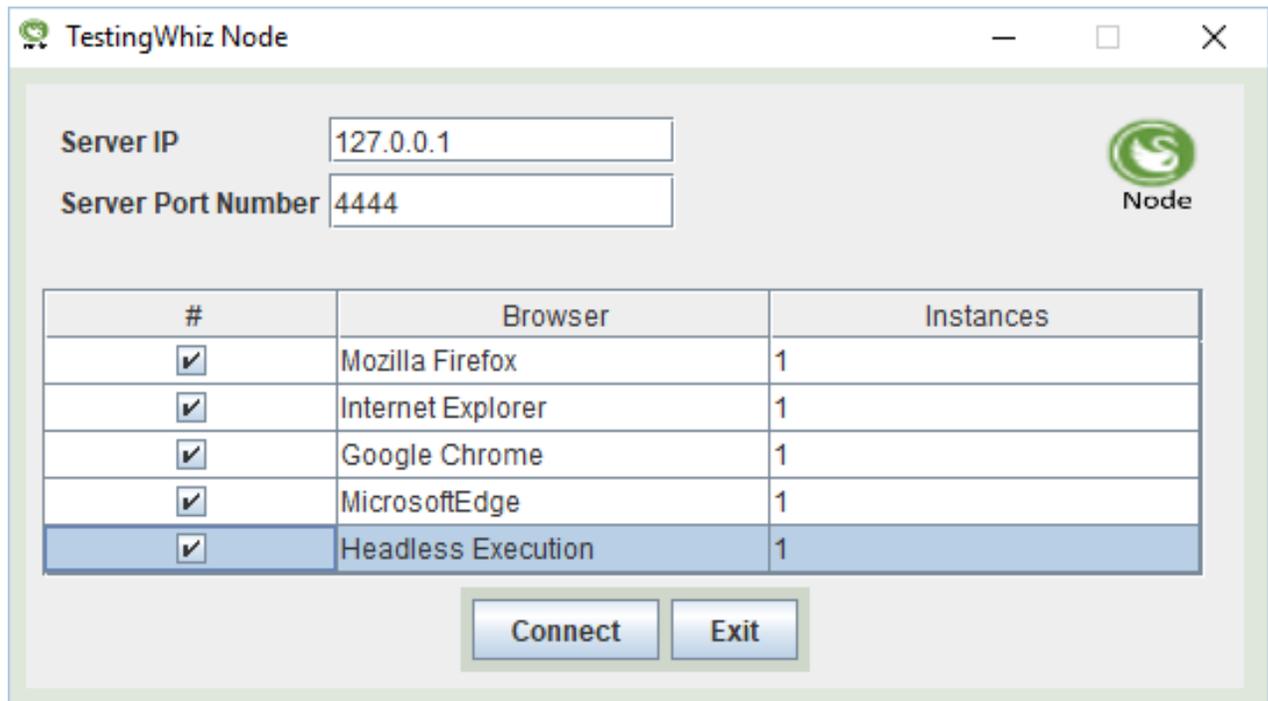


Server IP: - IP Address

Server port Number: - Port

Browser Configuration: -


- **#:** - Browser Usability flag
- **Browser:** - The name of the browser being used
- Instances:** -Maximum number of instances to allow to connect to grid

Connect a TestingWhiz Node and then it will show a success message.

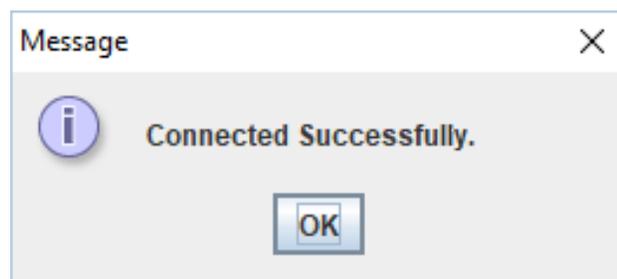

EXECUTE COMMANDS USING TESTINGWHIZ GRID

Setting - > Configuration -> TestingWhiz Grid

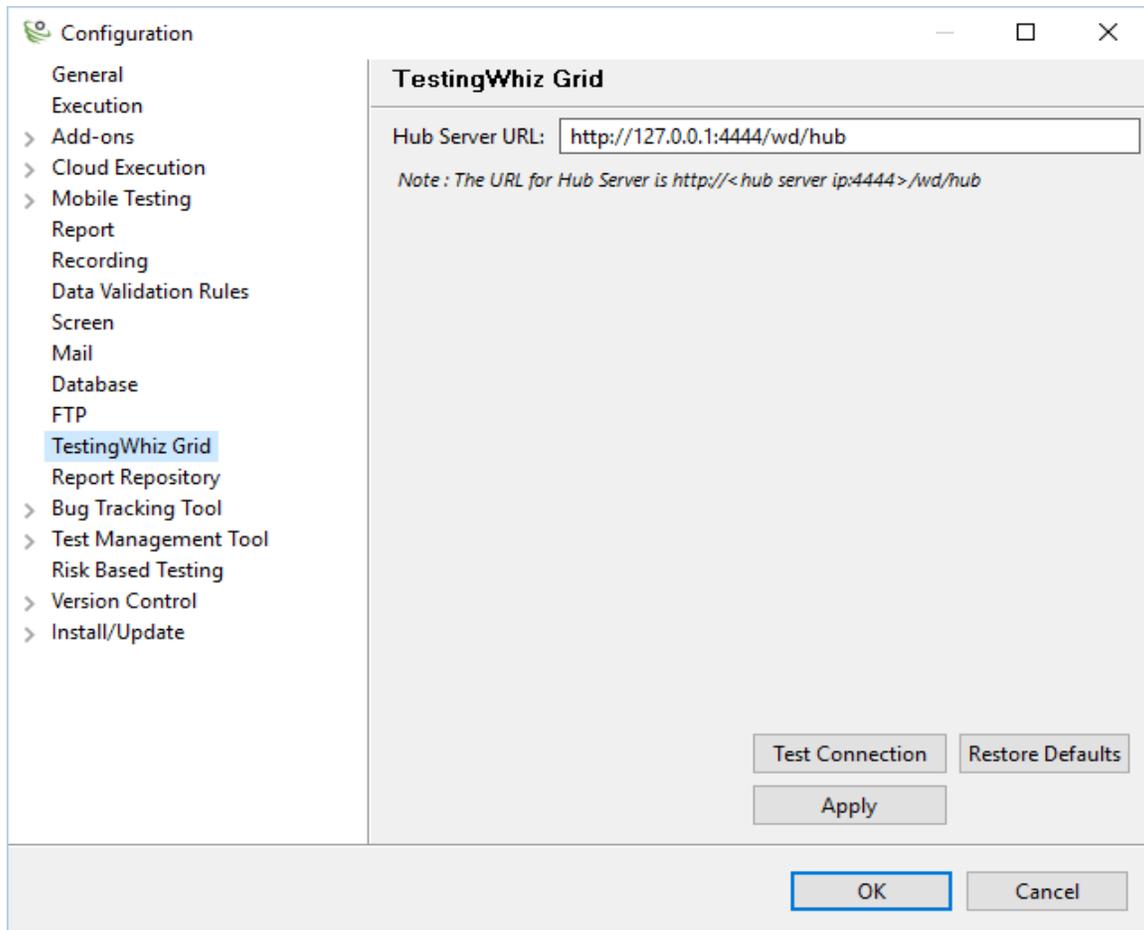

Hub Server Url :- `http://{IPAddress}:4444/wd/hub`

Execute test cases.

In case, if you need any kind of help then please feel free to drop us a line at support@testingwhiz.zendesk.com